


.040 .046 .050 .056 .061 .068 .075 .074 .074 .084 .086 .095 .098 .095 .096 .086 .074 .074 .075 .075 .069 .061 .057 .051 .047 .040
 .051 .060 .067 .072 .082 .087 .100 .121 .113 .111 .117 .120 .129 .157 .163 .158 .132 .121 .118 .111 .114 .119 .100 .099 .084 .073 .068 .061 .052



| | P3 (60.0) | P2 (60.0) | (60.0) | P1 |
|------|-----------|-----------|--------|------|
| 30.8 | 31.6 | 27.3 | 27.2 | 29.7 |
| 34.9 | 32.2 | 27.7 | 30.7 | 34.7 |
| 28.0 | 33.8 | 27.9 | 27.7 | 28.5 |
| 34.0 | 33.6 | 28.9 | 26.7 | 30.3 |
| 30.9 | 34.6 | 30.1 | 27.6 | 34.8 |
| 28.7 | 36.2 | 31.0 | 28.6 | 36.8 |
| 32.3 | 35.8 | 31.2 | 28.9 | 36.2 |
| 35.3 | 34.2 | 29.5 | 27.5 | 31.1 |
| 28.3 | 32.5 | 27.4 | 27.7 | 28.8 |
| 35.4 | 30.0 | 25.2 | 29.2 | 35.4 |
| 29.9 | 28.1 | 24.2 | 24.5 | 27.4 |

P6 (70.0) P5 (70.0) (70.0) P4
 Fixture Quantity Curve # Init Lum LLF Design Lum
 PDMR-SPDT 28 GE45E765.tLT 170000 0.840 142800
 PDMR-SPDT 12 ge45E763.tLT 170000 0.840 142800
 System Units: Feet/Footcandles
 Grid Average Max Min Avg/Min Max/Min CV #Points
 Horizontal 30.6 37.5 24.2 1.27 1.55 0.100 198

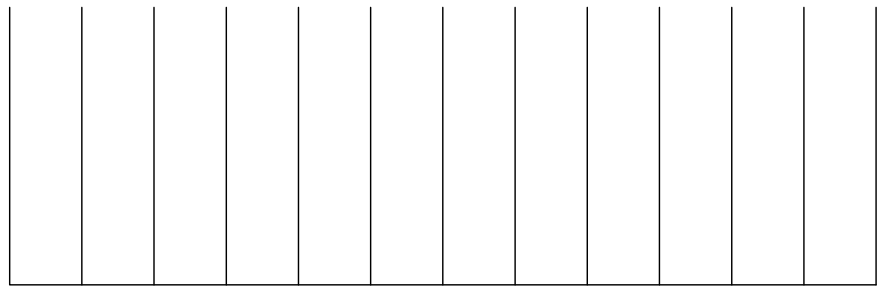

EBL ENGINEERS, LLC

Mechanical * Electrical * Fire Protection

The Professional Engineering Center
 8005 Harford Road, Baltimore, Maryland 21234-5701
 (410) 668-8000 Fax (410) 668-8001
 e-mail ebl@eblengineers.com

BAY HEAD PARK
FIELD MP-1

| | | | | |
|----------|-----|--------|----------|-----|
| DRAWN: | JEM | DATE: | 02/01/08 | E-2 |
| CHECKED: | RJH | SCALE: | NONE | |